




Just as a ship floats in the water, so the Zero Gravity lift-and-slide door or window fluctuate in the air, freed from its weight it flows effortlessly, slowed down only by the inertia of its mass. The naturalness and power of magnets give to the simple gesture of man, to lift and slide a sash of enormous dimensions, an unexpected force, perfect, without noise, without electricity.





ØG[®] patent


lowering and closing
unit

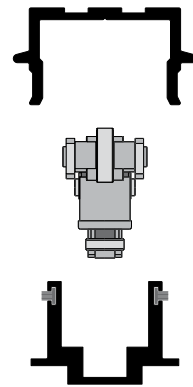


levitating and sliding
unit

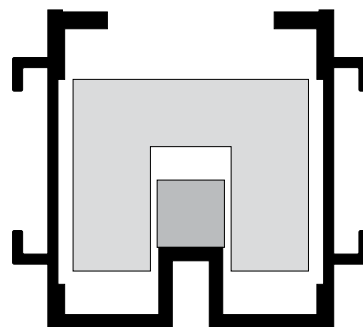


dimensions

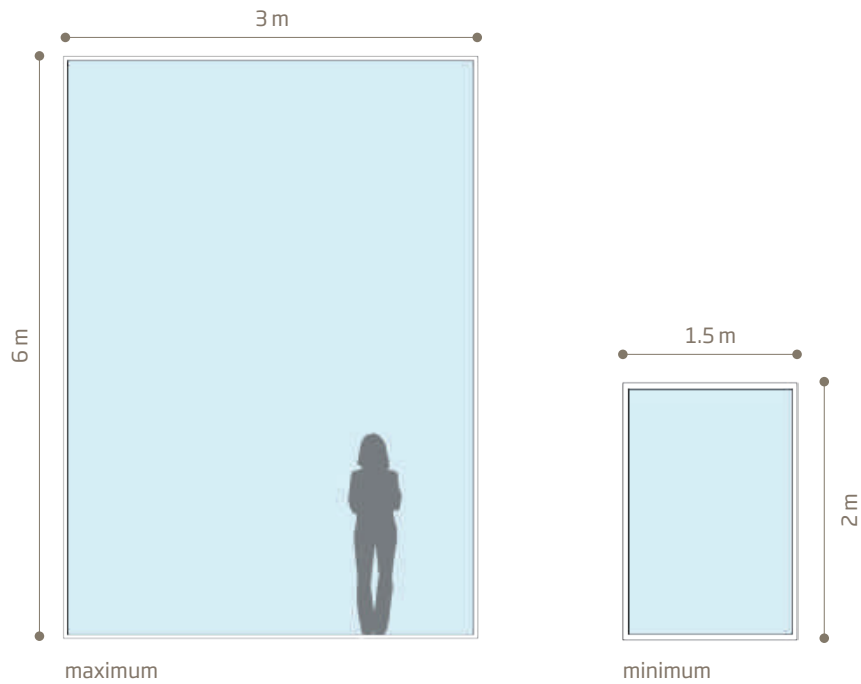

configurations

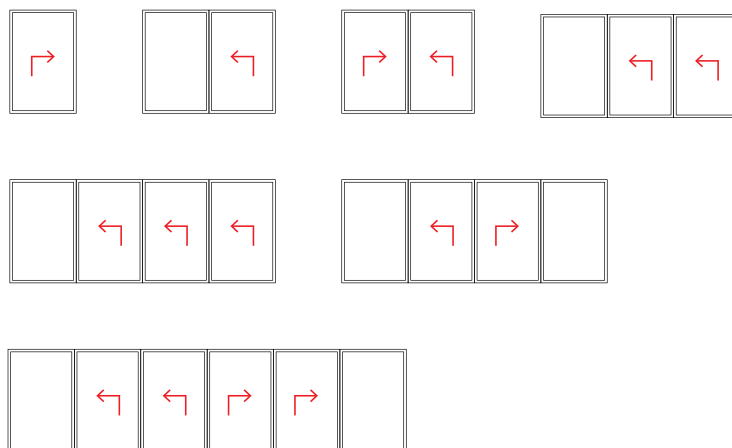


upper node

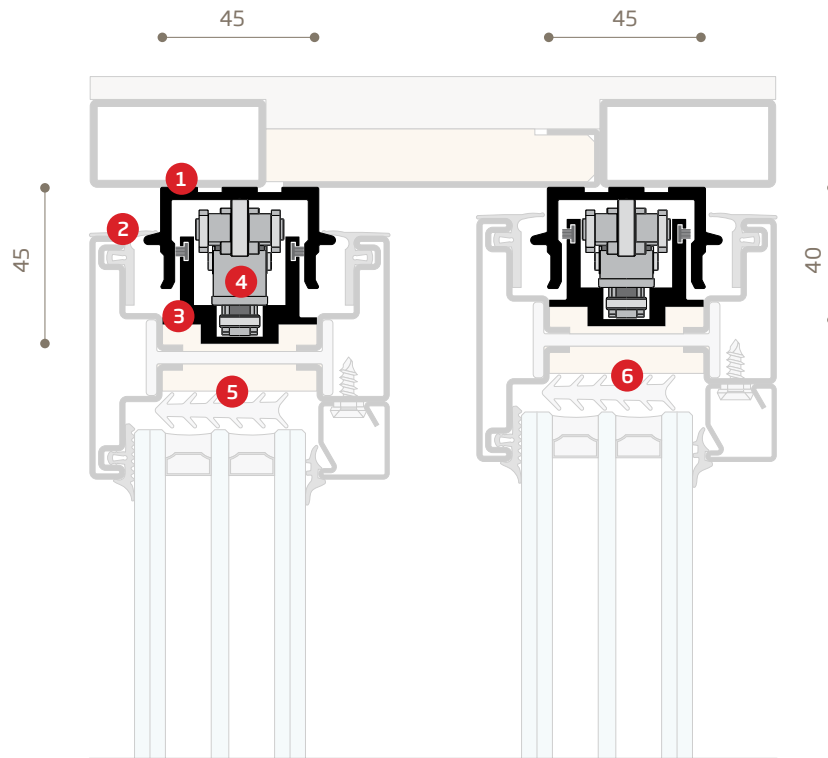

- 1 thermally insulated polyamide guide
- 2 double seal gasket
- 3 continuous alignment guide with brush-holder
- 4 lowering and closing mechanism
- 5 lowered sash frame - closure
- 6 lifted sash frame - opening

lower node

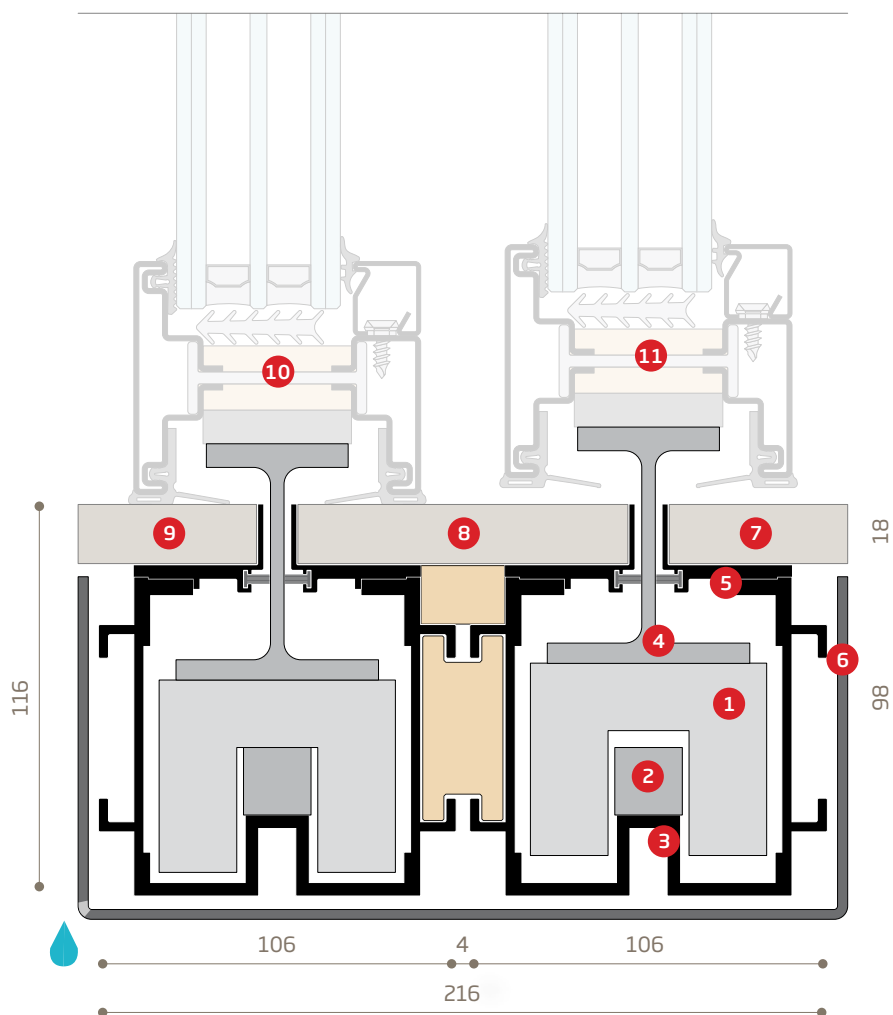

- ① Ironlev[®] magnetic levitation runner
- ② ferromagnetic stainless-steel rail
- ③ alignment modular profile
- ④ connecting beam between runner and frame
- ⑤ finishing profiles with brush-holder
- ⑥ containment and laying box
- ⑦ internal floor
- ⑧ removable capping profile for access and maintenance
- ⑨ external floor
- ⑩ lowered sash frame - closure
- ⑪ lifted sash frame - opening